


THE NEXT GENERATION OF ECOTANK PRINTERS FOR SCALABLE BUSINESSES.



Fast and High-volume Printing for Business Workloads.

The new all-in-one EcoTank L6370 and L6390 are designed to meet small and mid-sized businesses' printing needs. These higher-end models deliver high-quality, ultra-low-cost printing with an impressive 8,500¹ high page yield ink bottle and allow you to print remotely from smart devices. Thanks to Heat-Free Technology, users can also print responsibly with lower power consumption.

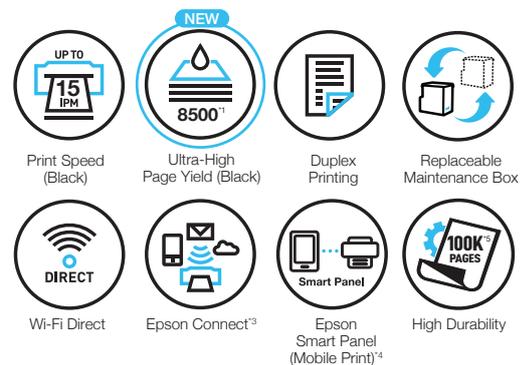

ENGINEERED FOR good



Boost Workplace Productivity

Experience faster printing workflow with a print speed of 18/9 ipm², automatic duplex printing, scanning, and copying, all within a compact design. Save space without compromising on performance.

Your Reliable Business Printer

Designed with durability in mind, you can print up to 100,000 pages – covered under warranty⁵. Enjoy additional cost savings with our high-yield, low-cost ink bottles.

Seamless User Experience

Print effortlessly with the touchscreen display, and download the Epson Smart Panel app⁴ to easily set up, print remotely and check ink levels.

¹ Applicable to 001 BK ink bottle only.

² Print speed is based on simplex black-and-white printing, measured in accordance with ISO 24734 on A4-sized paper.

³ Supported Epson Connect features: Epson Smart Panel, Epson Email Print, Remote Print Driver and Scan to Cloud.

⁴ Download Epson Smart Panel App from IOS or Android App Stores.

⁵ Printhead included under warranty. For more information, please refer to www.epson.com.sg.


SPECIFICATIONS

Model Number	L6370	L6390
Printer Type	Print, Scan, Copy with ADF	Print, Scan, Copy, Fax with ADF
Printing	PrecisionCore Printhead 400 x 1 nozzles Black 128 x 1 nozzles per colour (Cyan, Magenta, Yellow) Bi-directional printing 4,800 x 1,200 dpi (with Variable-Sized Droplet Technology) 3.3 pl	
Print Direction	Up to 35 ppm / 23 ppm Simplex: Up to 18.0 ipm / 9.0 ipm Duplex: Up to 7.0 ipm / 5.0 ipm	
Maximum Resolution	Simplex: Approx. 8.5 sec / 13.5 sec Duplex: Approx. 16.0 sec / 24.0 sec Approx. 50.0 sec / 76.0 sec	
Minimum Ink Droplet Volume	3.3 pl	
Print Speed*1	Up to 35 ppm / 23 ppm Simplex: Up to 18.0 ipm / 9.0 ipm Duplex: Up to 7.0 ipm / 5.0 ipm	
Draft Text - Memo, A4 (Black*1 / Colour*2)	Simplex: Approx. 8.5 sec / 13.5 sec Duplex: Approx. 16.0 sec / 24.0 sec Approx. 50.0 sec / 76.0 sec	
ISO 24734, A4 (Black / Colour)	Simplex: Up to 11.5 ipm / 5.7 ipm Simplex: Up to 12.0 ipm / 5.0 ipm Duplex: Up to 6.0 ipm / 3.0 ipm	
First Page Out Time (Black / Colour)	Standard / High	
Photo Default - 10 x 15 cm / 4 x 6" 2/3	25 - 400%	
(Border / Borderless)	99 copies	
Printer Language	600 x 600 dpi	
Automatic 2-sided printing	Legal	
Copying	Legal	
Copy Speed	Flatbed: 9.0 sec ADF (Simplex / Duplex): Up to 5.0 ipm / 3.5 ipm Flatbed: 21.0 sec ADF (Simplex / Duplex): Up to 5.0 ipm / 3.5 ipm	
ISO 29183, A4 (Black / Colour), Flatbed	Flatbed: 9.0 sec ADF (Simplex / Duplex): Up to 5.0 ipm / 3.5 ipm	
ISO 24735, A4 (Black / Colour), ADF	Flatbed: 21.0 sec ADF (Simplex / Duplex): Up to 5.0 ipm / 3.5 ipm	
Copy Quality	Flatbed: 9.0 sec ADF (Simplex / Duplex): Up to 5.0 ipm / 3.5 ipm Flatbed: 21.0 sec ADF (Simplex / Duplex): Up to 5.0 ipm / 3.5 ipm	
Reduction / Enlargement	Flatbed: 9.0 sec ADF (Simplex / Duplex): Up to 5.0 ipm / 3.5 ipm Flatbed: 21.0 sec ADF (Simplex / Duplex): Up to 5.0 ipm / 3.5 ipm	
Maximum Copies from Standalone	Flatbed: 9.0 sec ADF (Simplex / Duplex): Up to 5.0 ipm / 3.5 ipm Flatbed: 21.0 sec ADF (Simplex / Duplex): Up to 5.0 ipm / 3.5 ipm	
Maximum Copy Resolution	Flatbed: 9.0 sec ADF (Simplex / Duplex): Up to 5.0 ipm / 3.5 ipm Flatbed: 21.0 sec ADF (Simplex / Duplex): Up to 5.0 ipm / 3.5 ipm	
Maximum Copy Size	Flatbed: 9.0 sec ADF (Simplex / Duplex): Up to 5.0 ipm / 3.5 ipm Flatbed: 21.0 sec ADF (Simplex / Duplex): Up to 5.0 ipm / 3.5 ipm	
Scanning	Flatbed: 9.0 sec ADF (Simplex / Duplex): Up to 5.0 ipm / 3.5 ipm Flatbed: 21.0 sec ADF (Simplex / Duplex): Up to 5.0 ipm / 3.5 ipm	
Scanner Type	Flatbed colour image scanner	
Sensor Type	CIS	
Optical Resolution	1,200 x 2,400 dpi	
Maximum Scan Area	216 x 297 mm (8.5 x 11.7")	
Scanner Bit Depth	216 x 297 mm (8.5 x 11.7")	
Colour	48-bit input, 24-bit output	
Grayscale	16-bit input, 8-bit output	
Black & White	16-bit input, 1-bit output	
Scan Speed (Flatbed / ADF)	48-bit input, 24-bit output	
Monochrome	16-bit input, 8-bit output	
Colour	16-bit input, 1-bit output	
Fax Function	48-bit input, 24-bit output	
Type of Fax	16-bit input, 8-bit output	
Receive Memory / Page Memory	16-bit input, 1-bit output	
Error Correction Mode	16-bit input, 1-bit output	
Fax Speed (Data Transfer Rate)	16-bit input, 1-bit output	
Fax Resolution	16-bit input, 1-bit output	
Transmission Paper Size	16-bit input, 1-bit output	
Flatbed	16-bit input, 1-bit output	
ADF	16-bit input, 1-bit output	
Receiving Paper Size	16-bit input, 1-bit output	
Speed Dial / Group Dial	16-bit input, 1-bit output	
Fax Features	16-bit input, 1-bit output	
ADF Function	16-bit input, 1-bit output	
Support Paper Thickness	16-bit input, 1-bit output	
Paper Capacity	16-bit input, 1-bit output	
Paper Handling	16-bit input, 1-bit output	
Paper Feed Method	16-bit input, 1-bit output	
Number of Paper Trays	16-bit input, 1-bit output	
Paper Hold Capacity	16-bit input, 1-bit output	
Input Capacity	16-bit input, 1-bit output	
Output Capacity	16-bit input, 1-bit output	
Support Paper Size	16-bit input, 1-bit output	
Maximum Paper Size	16-bit input, 1-bit output	
Print Margin	16-bit input, 1-bit output	
Support Paper Weight	16-bit input, 1-bit output	
Plain Paper	16-bit input, 1-bit output	
Photo Paper	16-bit input, 1-bit output	
Interface	16-bit input, 1-bit output	
USB	16-bit input, 1-bit output	
Network	16-bit input, 1-bit output	
Network Protocol	16-bit input, 1-bit output	
Network Printing Protocol	16-bit input, 1-bit output	
Network Management Protocols	16-bit input, 1-bit output	
Control Panel	16-bit input, 1-bit output	
LCD Screen	16-bit input, 1-bit output	
Mobile and Cloud Printing	16-bit input, 1-bit output	
Epson Connect	16-bit input, 1-bit output	
Driverless Solutions	16-bit input, 1-bit output	
Supported Operating Systems	16-bit input, 1-bit output	
Windows	16-bit input, 1-bit output	
Mac	16-bit input, 1-bit output	
Printer Software	16-bit input, 1-bit output	
Software Solutions Compatibility	16-bit input, 1-bit output	
Electrical Specifications	16-bit input, 1-bit output	
Rated Voltage	16-bit input, 1-bit output	
Rated Frequency	16-bit input, 1-bit output	
Power Consumption	16-bit input, 1-bit output	
Operating	16-bit input, 1-bit output	
Standby	16-bit input, 1-bit output	
Sleep	16-bit input, 1-bit output	
Power Off	16-bit input, 1-bit output	
Noise Level	16-bit input, 1-bit output	
PC Printing / Premium Glossy Photo Paper	16-bit input, 1-bit output	
Best Photo	16-bit input, 1-bit output	
PC Printing / Plain Paper Default*4	16-bit input, 1-bit output	
Epson Consumable	16-bit input, 1-bit output	
Black Ink Bottle	16-bit input, 1-bit output	
Cyan Ink Bottle	16-bit input, 1-bit output	
Magenta Ink Bottle	16-bit input, 1-bit output	
Yellow Ink Bottle	16-bit input, 1-bit output	
Maintenance Box	16-bit input, 1-bit output	

Dimensions & Weight


L6370

Weight: 7.2 kg

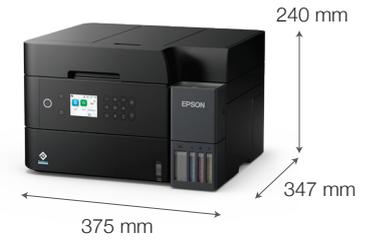

L6390

Weight: 7.3 kg

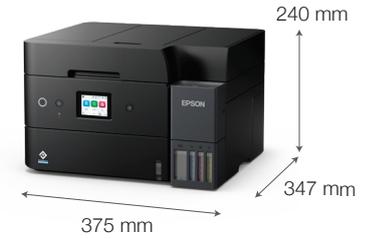

*1 Print speed (Pages Per Minute) is calculated when printed on A4 plain paper in the fastest mode, 10 x 15 cm photo print speed when printed on Epson Premium Glossy Photo Paper. Print speed may vary depending on system configuration, print mode, document complexity, software, type of paper used and connectivity. Print speed does not include processing time on host computer.



*2 When printed on Epson Premium Glossy Photo Paper.

*3 Borderless printing is supported up to A4, otherwise 3mm top, left, right, bottom.

*4 Default mode in accordance with ISO7779 for MFPs.

*5 Quoted yields are extrapolated based on Epson original methodology from the print simulation of Test Patterns provided in ISO/IEC 24712. Quoted yields are NOT based on ISO/IEC 24711. Quoted yields may vary depending on the images that you are printing, the paper type that you are using, the frequency of your prints and environmental conditions such as temperature. During the initial printer setup, a certain amount of ink is used to fill the print head's nozzles, therefore the yield of the initial bundled set can be lower.

© 2025 Epson Singapore Pte Ltd. All Rights Reserved. Reproduction in part or in whole, without the written permission from Epson, is strictly prohibited. EPSON is registered trademark of Seiko Epson Corporation. All other product names and other company names used herein are for identification purposes only and are the trademarks or registered trademarks of their respective owners. Epson disclaims any and all rights in those marks. Print samples shown are simulations only. Specifications and product availability are subject to change without notice and may vary between countries. Please check with local Epson offices for more information.

Dealer's Stamp

Information correct at time of printing
Printed April 2025